




FASSWAGEN FÜR 60-/ 200-LITER-FÄSSER

Zum Lagern und Transportieren von wassergefährdenden und entzündbaren Flüssigkeiten

- ◆ Auffangwanne aus 3 mm Stahlblech
- ◆ Auffangwanne entsprechend AwSV - **Ü-Zeichen gemäß StawaR**
- ◆ Herausnehmbare, feuerverzinkte Gitterroste
- ◆ Korrosionsschutz durch Grundierung und Lackierung oder

Feuerverzinkung

- ◆ Standardmäßig mit 2 Lenk- und 2 Bockrollen und Schubstange



WSP-20S/W, feuerverzinkt,
Artikel-Nr. P21-1407-A,
mit optionalem Fassbock



Passende Fassböcke
finden Sie
auf Seite 17!



WSP-10S/W,
Artikel-Nr. P21-2406-A,
mit optionalem Zurrgrurt



WSP-20S/W60,
Artikel-Nr. P21-2408-A



Fahrbare PE-Auffang-
wannen finden Sie
auf Seite 41!



WSP-20S/W, feuerverzinkt
Artikel-Nr. P21-1407-A




Drehbare Rollenauflage,
Artikel-Nr. Z50-1925-B

Typenbezeichnung	WSP-20S/W60	WSP-10S/W	WSP-20S/W
Außenmaße B x T in mm	820 x 500	800 x 860	800 x 1400
Höhe (ohne Schubstange) in mm	345	525	405
Auffangvolumen in Liter	60	220	220
Kapazität à 60/200-Liter-Fass (stehend)	2 x 60	1 x 200	2 x 200
Artikel-Nr., lackiert	P21-2408-A	P21-2406-A	P21-2407-A
Artikel-Nr., feuerverzinkt	P21-1408-A	P21-1406-A	P21-1407-A
Zubehör	Artikel-Nr.		
Zurrgrurt	Z50-1920-A		
Drehbare Rollenauflage	Z50-1925-B		

FASS-SCHRÄNKE AUS STAHL

Zur Lagerung von wassergefährdenden und entzündbaren Flüssigkeiten


- ◆ Auffangwanne aus 3 mm Stahlblech
- ◆ Auffangwanne entsprechend AwSV - **Ü-Zeichen gemäß StawaR**
- ◆ 100 mm Bodenfreiheit für Staplertransport
- ◆ Abschließbare Ausführungen, dadurch auch zur Lagerung im Freien geeignet
- ◆ Auffangvolumen 220 Liter
- ◆ Korrosionsschutz durch Grundierung und Lackierung der Auffangwanne
- ◆ Wetterschutzaufbau aus Stahlblech verzinkt, mit Lüftungsöffnungen in den Seitenwänden zur passiven Lagerung von entzündbaren Flüssigkeiten
- ◆ Dokumentenablage im Türfach serienmäßig



WSP-1SKKS-D,
Artikel-Nr. P21-2480-A



WSP-2SKKS-D,
Artikel-Nr. P21-2481-A

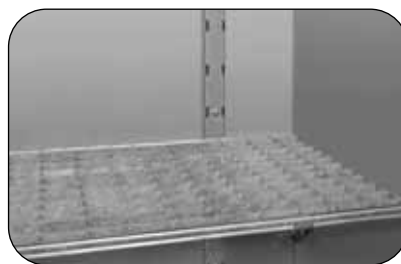

Gitterrostböden im Raster von
100 mm höhenverstellbar



Lüftungsöffnungen in den
Seitenwänden



WSP-1SKKS-D/GR,
Artikel-Nr. P21-2482-A



WSP-2SKKS-D/GR,
Artikel-Nr. P21-2483-A


Typenbezeichnung	WSP-1SKKS-D	WSP-2SKKS-D	WSP-1SKKS-D/GR	WSP-2SKKS-D/GR
Kapazität à 200-Liter-Fass	1	2	-	-
Außenmaße B x T in mm	900 x 750	1760 x 750	900 x 750	1760 x 750
Gesamthöhe in mm	1900	1720	1900	1720
Innenmaße B x T in mm	740 x 660	2 x 740 x 660	740 x 660	2 x 740 x 660
Fachhöhe in mm	1360	1360	3 x 400	3 x 400
Auffangvolumen in Liter	220	220	220	220
Belastung in kg	250	500	250	500
Gewicht in kg	132	196	146	230
Artikel-Nr., Wanne lackiert, Aufbau verzinkt	P21-2480-A	P21-2481-A	P21-2482-A	P21-2483-A



DRUM CARTS FOR 60 / 200 LITER DRUMS

For the transport of water-endangering and flammable liquids

- ◆ Base sump tray made from 3 mm sheet steel
- ◆ Base sump tray according to AwSV - **Ü-sign according to StawaR**
- ◆ Removable galvanized grid
- ◆ Corrosion protection by primer coating and painting or by **fire-galvanization**
- ◆ Equipped with 2 fixed and 2 swiveling castors and push bar as standard



WSP-20S/W, fire-galvanized,
Article no. P21-1407-A,
with optional drum stand



Suitable drum stands
can be found
on page 17!



WSP-10S/W,
Article no. P21-2406-A,
with optional tension belt



WSP-20S/W60,
Article no. P21-1408-A



PE drum carts can be
found on page 41!



WSP-20S/W, fire-galvanized,
Article no. P21-1407-A



Rotating drum support,
Article no. Z50-1925-B


Model	WSP-20S/W60	WSP-10S/W	WSP-20S/W
External dimensions W x D (mm)	820 x 500	800 x 860	800 x 1400
Height (without push bar) (mm)	345	525	405
Sump capacity (l)	60	220	220
Capacity, 200 liter drums (vertical)	2 x 60	1 x 200	2 x 200
Article no., painted	P21-2408-A	P21-2406-A	P21-2407-A
Article no., fire-galvanized	P21-1408-A	P21-1406-A	P21-1407-A

Accessories	Article no.
Tension belt	Z50-1920-A
Rotating drum support	Z50-1925-B

STEEL DRUM CABINETS

For the storage of water-endangering liquids

- ◆ Base sump tray made from 3 mm sheet steel
- ◆ Base sump tray according to AwSV - **Ü-sign according to StawaR**
- ◆ Ground clearance 100 mm for internal transport
- ◆ Lockable versions also suitable for storage outdoors
- ◆ Sump capacity 220 liter
- ◆ Corrosion protection by primer coating and painting of sump pallet
- ◆ Weather-proof superstructure made from galvanized sheet steel, with venting slots in the side walls
- ◆ Compartment for documents in the door(s) as standard



WSP-1SKKS-D,
Article no. P21-2480-A



WSP-2SKKS-D,
Article no. P21-2481-A



Height-adjustable galvanized
grids at intervals of 100 mm



Venting slots in the sidewalls



WSP-1SKKS-D/GR,
Article no. P21-2482-A



WSP-2SKKS-D/GR,
Article no. P21-2483-A

Model	WSP-1SKKS-D	WSP-2SKKS-D	WSP-1SKKS-D/GR	WSP-2SKKS-D/GR
Capacity, 200 liter drums	1	2	-	-
External dimensions W x D (mm)	900 x 750	1760 x 750	900 x 750	1760 x 750
Total height (mm)	1900	1720	1900	1720
Internal dimensions W x D (mm)	740 x 660	2 x 740 x 660	740 x 660	2 x 740 x 660
Compartment height (mm)	1360	1360	3 x 400	3 x 400
Sump capacity (l)	220	220	220	220
Max. load (kg)	250	500	250	500
Weight (kg)	132	196	146	230
Article no., painted sump pallet, galvanized superstructure	P21-2480-A	P21-2481-A	P21-2482-A	P21-2483-A