



REGAL-BODENWANNEN FÜR PALETTENREGALE / FASSLAGERUNG

Zur Lagerung von wassergefährdenden und entzündbaren Flüssigkeiten

Die Lagerung wassergefährdender und entzündbarer Stoffe in Palettenregalen gestattet der Gesetzgeber nur, wenn diese mit einem zugelassenen Auffangsystem ausgestattet sind.

So können vorhandene Palettenregale schnell und kostengünstig in ein zugelassenes Gefahrstofflager umgewandelt werden.

- ◆ Auffangwanne aus 3 mm **feuerverzinktem** Stahlblech
- ◆ Auffangwanne entsprechend AwSV - **Ü-Zeichen** **gemäß StawaR**
- ◆ Mit oder ohne Gitterroststellfläche lieferbar
- ◆ Belastung 1000 kg / m²
- ◆ Bodenfreiheit 100 mm



WSR-BG 13.27/360,
Artikel-Nr. R23-1902-F



Bei Ausstattung mit Gitterrost kann die Regalbodenwanne auch als 1. Lagerebene genutzt werden.



Ausführung mit PE-Einsatz

Regal-Bodenwanne ohne Gitterrost für Feldweite in mm

	1800	2200	2700	2700	3300
Typenbezeichnung	WSR-B 13.18/360	WSR-B 13.22/360	WSR-B 13.27/360	WSR-B 13.27/660	WSR-B 13.33/660
Abmaße B x T x H in mm	1780 x 1300 x 322	2180 x 1300 x 292	2680 x 1300 x 267	2680 x 1300 x 357	3280 x 1300 x 322
Auffangvolumen in Liter	360	360	360	660	660
Gewicht in kg	101	114	138	155	172
Artikel-Nr., feuerverzinkt	R23-1801-F	R23-1807-F	R23-1802-F	R23-1808-F	R23-1803-F
Artikel-Nr., PE-Einsatz für aggr. Medien	R23-5611-F	R23-5617-F	R23-5612-F	R23-5618-F	R23-5613-F

Regal-Bodenwanne mit Gitterrost für Feldweite in mm

	1800	2200	2700	2700	3300
Typenbezeichnung	WSR-BG 13.18/360	WSR-BG 13.22/360	WSR-BG 13.27/360	WSR-BG 13.27/660	WSR-BG 13.33/660
Abmaße B x T x H in mm	1780 x 1300 x 340	2180 x 1300 x 310	2680 x 1300 x 285	2680 x 1300 x 375	3280 x 1300 x 345
Auffangvolumen in Liter	360	360	360	660	660
Gewicht in kg	172	200	244	260	302
Artikel-Nr., feuerverzinkt	R23-1901-F	R23-1907-F	R23-1902-F	R23-1908-F	R23-1903-F
Artikel-Nr., PE-Einsatz für aggr. Medien	R23-5621-F	R23-5627-F	R23-5622-F	R23-5628-F	R23-5603-F

Abgebildete Regale sind nicht im Preis enthalten!

REGAL-BODENWANNEN FÜR PALETTENREGALE / KTC-LAGERUNG


Zur Lagerung von wassergefährdenden und entzündbaren Flüssigkeiten

- ◆ Auffangwanne aus 3 mm **feuerverzinktem** Stahlblech
- ◆ Auffangwanne entsprechend AwSV - **Ü-Zeichen gemäß StawaR**
- ◆ Mit oder ohne Gitterroststellfläche lieferbar
- ◆ Belastung 1500 kg / m²
- ◆ Bodenfreiheit 100 mm



i

Bei Ausstattung mit Gitterrost kann die Regalbodenwanne auch als 1. Lagerebene genutzt werden.

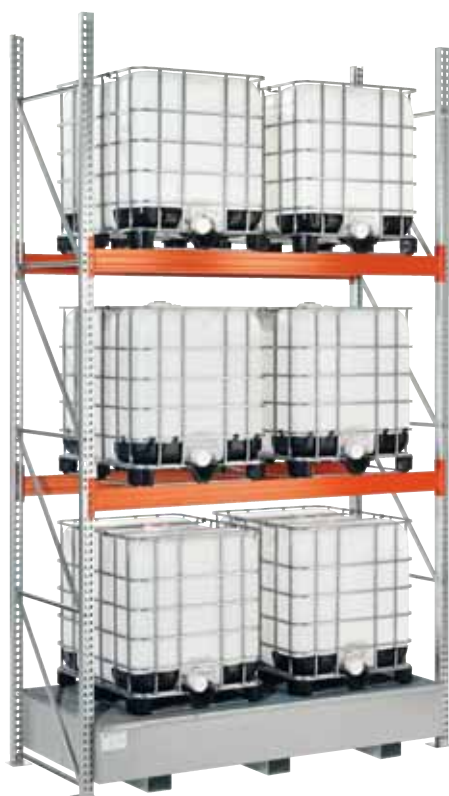

WSR-BG 13.22/1000,
Artikel-Nr. R23-1904-F,
in ein KTC-Regal integriert



WSR-BG 13.22/1000,
Artikel-Nr. R23-1904-F



Regal-Bodenwanne ohne Gitterrost für Feldweite in mm

	1800	2200	2700	3300
Typenbezeichnung	WSR-B 13.18/1000	WSR-B 13.22/1000	WSR-B 13.27/1000	WSR-B 13.33/1000
Abmaße B x T x H in mm	1780 x 1300 x 622	2180 x 1300 x 542	2680 x 1300 x 462	3280 x 1300 x 402
Auffangvolumen in Liter	1000	1000	1000	1000
Gewicht in kg	143	164	174	189
Artikel-Nr., feuerverzinkt	R23-1809-F	R23-1804-F	R23-1805-F	R23-1806-F
Artikel-Nr., PE-Einsatz für aggr. Medien	R23-5619-F	R23-5614-F	R23-5615-F	R23-5616-F

Regal-Bodenwanne mit Gitterrost für Feldweite in mm

	1800	2200	2700	3300
Typenbezeichnung	WSR-BG 13.18/1000	WSR-BG 13.22/1000	WSR-BG 13.27/1000	WSR-BG 13.33/1000
Abmaße B x T x H in mm	1780 x 1300 x 640	2180 x 1300 x 560	2680 x 1300 x 480	3280 x 1300 x 420
Auffangvolumen in Liter	1000	1000	1000	1000
Gewicht in kg	259	304	359	394
Artikel-Nr., feuerverzinkt	R23-1909-F	R23-1904-F	R23-1905-F	R23-1906-F
Artikel-Nr., PE-Einsatz für aggr. Medien	R23-5619-F	R23-5614-F	R23-5615-F	R23-5616-F

Abgebildete Regale sind nicht im Preis enthalten!



REGAL-BODENWANNEN AUS PE FÜR PALETTENREGALE

Zur Lagerung von wassergefährdenden und aggressiven Medien

- ◆ Rotationsgeformter Wannenkörper aus PE schwarz
- ◆ Umlaufende Stabilisierungsrippen
- ◆ Bodenfreiheit für innerbetrieblichen Transport
- ◆ Beim Typ PE-B 13.33 können die IBC-Behälter direkt auf die Regal-Bodenwanne abgestellt werden

Zul.-Nr.: Z-40.22-588



Unser komplettes Sortiment an Auffangwannen aus PE finden Sie ab Seite 33!



PE-B 13.33, ohne PE-Lochplatte, Artikel-Nr. P70-2047-A



PE-B 13.27, Artikel-Nr. P70-2046-A, in ein KTC-Regal integriert



PE-B 13.22, ohne Stellebene, Artikel-Nr. P70-2045-A, in ein Palettenregal integriert

Regal-Bodenwanne ohne Gitterrost für Feldweite in mm

2200

2700

3300

Typenbezeichnung

PE-B 13.22

PE-B 13.27

PE-B 13.33

Abmaße B x T x H in mm

2165 x 1300 x 575

2665 x 1300 x 500

3255 x 1340 x 470

Auffangvolumen in Liter

1000

1000

1000

Gewicht in kg

52

62

73

Artikel-Nr., ohne PE-Lochplatte

P70-2045-A

P70-2046-A

P70-2047-A

Abgebildete Regale sind nicht im Preis enthalten!

EINHÄNGEWANNEN FÜR PALETTENREGALE

Zur Lagerung von wassergefährdenden und entzündbaren Flüssigkeiten mit Flammpunkt >55°C

Hervorragend geeignet, um bestehende Palettenregalanlagen schnell und kostengünstig mit Auffangwannen nachzurüsten. Die Einhängewannen liegen auf den Regaltraversen auf und sind durch diese Bauweise vor Herabfallen geschützt.


- ◆ Auffangwanne aus 3 mm **feuerverzinktem** Stahlblech
- ◆ Auffangwanne entsprechend AwSV - **Ü-Zeichen gemäß StawaR**
- ◆ Auffangvolumen ausgelegt für Fasslagerung, größere Auffangvolumen auf Anfrage
- ◆ Mit Gitterroststellfläche



WSR-E 13.27/220,
Artikel-Nr. R23-1702-E,
eingebaut in ein Palettenregal



WSR-E 13.33/220,
Artikel-Nr. R23-1703-E

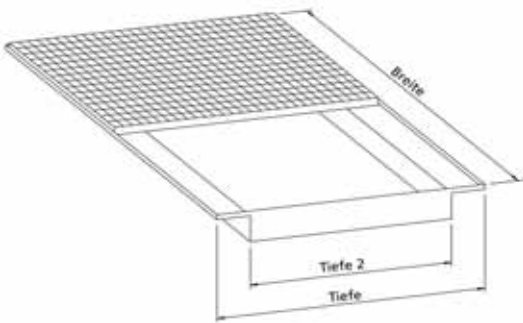

WSR-E 13.33/220,
Artikel-Nr. R23-1703-E

i

Auch für weitere Regalgrößen lieferbar.
Maßanfertigung möglich!



Regal-Einhängewanne für Feldweite in mm	1800	2200	2700	3300
Typenbezeichnung	WSR-E 13.18/220	WSR-E 13.22/220	WSR-E 13.27/220	WSR-E 13.33/220
Abmaße B x T x H in mm	1780 x 1300 x 198	2180 x 1300 x 173	2680 x 1300 x 158	3280 x 1300 x 148
Tiefe 2 in mm	970	970	970	970
Auffangvolumen in Liter	220	220	220	220
Gewicht in kg	148	174	210	256
Artikel-Nr., feuerverzinkt	R23-1701-E	R23-1704-E	R23-1702-E	R23-1703-E
Artikel-Nr., PE-Einsatz	R23-5601-E	R23-5604-E	R23-5602-E	R23-5603-E

Abgebildete Regale sind nicht im Preis enthalten!




RACK BASE SUMPS FOR PALLET RACKS / DRUM STORAGE

For the storage of water-endangering and flammable liquids

The storage of water-endangering and flammable substances in pallet racks is officially permitted only when these are equipped with an approved sump system.

This means that existing pallet racks can be rapidly and cheaply converted into an approved storage system for hazardous goods.


- ◆ Base sump tray made from 3 mm **fire-galvanized** sheet steel
- ◆ Base sump tray according to AwSV - **Ü-sign**
according to StawaR
- ◆ Available with and without grid supports
- ◆ Max load 1000 kg / m²
- ◆ Ground clearance 100 mm

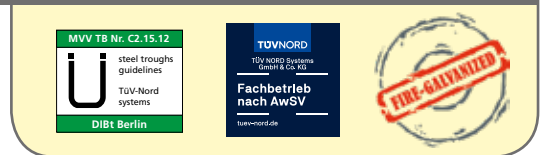

WSR-BG 13.27/360,
Article no. R23-1902-F



**If fitted with a grid support the
rack base sumps can be used
as a first storage level.**

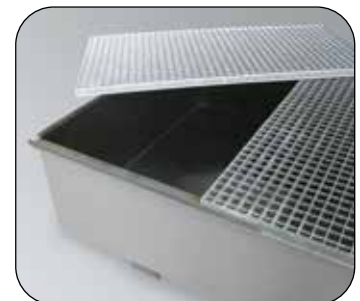

Version with PE-insert

Rack sump pallet without grid support for unit width (mm)

	1800	2200	2700	2700	3300
Model	WSR-B 13.18/360	WSR-B 13.22/360	WSR-B 13.27/360	WSR-B 13.27/660	WSR-B 13.33/660
Dimensions W x D x H (mm)	1780 x 1300 x 322	2180 x 1300 x 292	2680 x 1300 x 267	2680 x 1300 x 357	3280 x 1300 x 322
Sump capacity (l)	360	360	360	660	660
Weight (kg)	101	114	138	155	172
Article no., fire-galvanized	R23-1801-F	R23-1807-F	R23-1802-F	R23-1808-F	R23-1803-F
Article no., PE-insert for aggressive media	R23-5611-F	R23-5617-F	R23-5612-F	R23-5618-F	R23-5613-F

Rack sump pallet with grid support for unit width (mm)


	1800	2200	2700	2700	3300
Model	WSR-BG 13.18/360	WSR-BG 13.22/360	WSR-BG 13.27/360	WSR-BG 13.27/660	WSR-BG 13.33/660
Dimensions W x D x H (mm)	1780 x 1300 x 340	2180 x 1300 x 310	2680 x 1300 x 285	2680 x 1300 x 375	3280 x 1300 x 345
Sump capacity (l)	360	360	360	660	660
Weight (kg)	172	200	244	260	302
Article no., fire-galvanized	R23-1901-F	R23-1907-F	R23-1902-F	R23-1908-F	R23-1903-F
Article no., PE-insert for aggressive media	R23-5621-F	R23-5627-F	R23-5622-F	R23-5628-F	R23-5603-F

The racks shown are not included in the price!

RACK BASE SUMPS FOR PALLET RACKS / KTC STORAGE


For the storage of water-endangering and flammable liquids

- ◆ Base sump tray made from 3 mm **fire-galvanized** sheet steel
- ◆ Base sump tray according to AwSV - **Ü-sign according to StawaR**
- ◆ Available with and without grid supports
- ◆ Max. load 1500 kg / m²
- ◆ Ground clearance 100 mm



i

If fitted with a grid support the rack base sumps can be used as a first storage level.

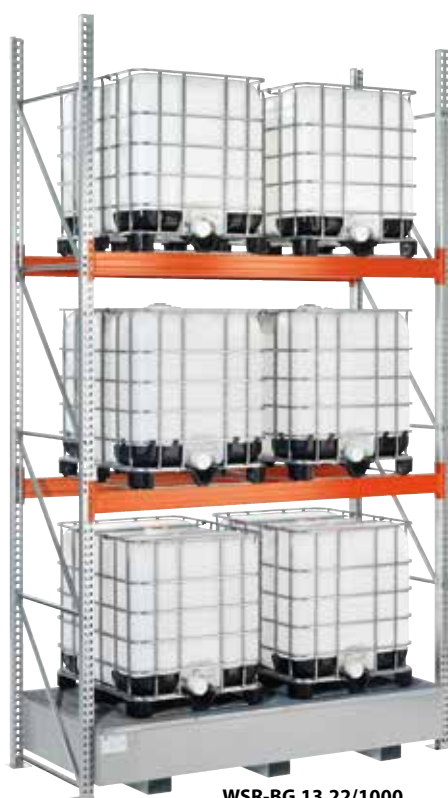

WSR-BG 13.22/1000,
Article no. R23-1904-F,
integrated in an existing KTC rack



WSR-BG 13.22/1000,
Article no. R23-1904-F



Rack sump pallet without grid support for unit width (mm)

	1800	2200	2700	3300
Model	WSR-B 13.18/1000	WSR-B 13.22/1000	WSR-B 13.27/1000	WSR-B 13.33/1000
Dimensions W x D x H (mm)	1780 x 1300 x 622	2180 x 1300 x 542	2680 x 1300 x 462	3280 x 1300 x 402
Sump capacity (l)	1000	1000	1000	1000
Weight (kg)	143	164	174	189
Article no., fire-galvanized	R23-1809-F	R23-1804-F	R23-1805-F	R23-1806-F
Article no., PE-insert for aggressive media	R23-5619-F	R23-5614-F	R23-5615-F	R23-5616-F

Rack sump pallet with grid support for unit width (mm)

	1800	2200	2700	3300
Model	WSR-BG 13.18/1000	WSR-BG 13.22/1000	WSR-BG 13.27/1000	WSR-BG 13.33/1000
Dimensions W x D x H (mm)	1780 x 1300 x 640	2180 x 1300 x 560	2680 x 1300 x 480	3280 x 1300 x 420
Sump capacity (l)	1000	1000	1000	1000
Weight (kg)	259	304	359	394
Article no., fire-galvanized	R23-1909-F	R23-1904-F	R23-1905-F	R23-1906-F
Article no., PE-insert for aggressive media	R23-5619-F	R23-5614-F	R23-5615-F	R23-5616-F

The racks shown are not included in the price!



RACK BASE SUMPS MADE FROM PE FOR PALLET RACKS

For storing water-endangering and aggressive media

- ◆ Rotationally-molded body of black PE
- ◆ Circumferential stabilizing ribs
- ◆ Ground clearance for internal transport
- ◆ With the PE-B 13.33 type, the IBC containers can be placed directly on the shelf bottom tray

Approval-No.: Z-40.22-588



Our complete range of
PE sumps please see
from page 33!



PE-B 13.33,
without PE grid,
Article no. P70-2047-A



PE-B 13.27,
Article no. P70-2046-A,
integrated in an existing KTC rack



PE-B 13.22, without PE grid,
Article no. P70-2045-A,
integrated in an existing pallet rack

Rack sump pallet without grid support for unit width (mm)

	2200	2700	3300
Model	PE-B 13.22	PE-B 13.27	PE-B 13.33
Dimensions W x D x H (mm)	2165 x 1300 x 575	2665 x 1300 x 500	3255 x 1340 x 470
Sump capacity (l)	1000	1000	1000
Weight (kg)	52	62	73
Article no., without PE grid	P70-2045-A	P70-2046-A	P70-2047-A

The racks shown are not included in the price!




SUSPENSION SUMPS FOR PALLET RACKS


For the storage of water-endangering and flammable liquids
with flashpoint >55°C

Ideally suitable for rapidly and cheaply equipping existing pallet racks with sumps. The suspension sumps lie on the rack crossbeams and are prevented from falling by their construction.

- ◆ Base sump tray made from 3 mm **fire-galvanized** sheet steel
- ◆ Base sump tray according to AwSV - **Ü-sign according to StawaR**
- ◆ Sump capacity for drum storage, larger sump capacities on request
- ◆ With grid support
- ◆ Max. load 1000 kg / m²



WSR-E 13.33/220,
Article no. R23-1703-E

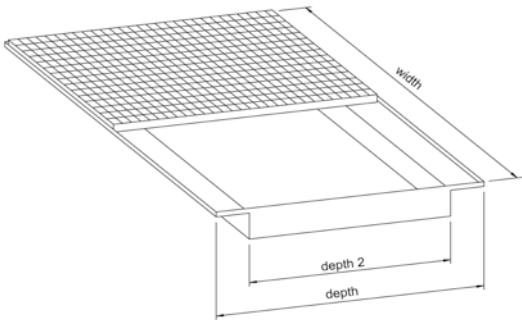

WSR-E 13.33/220,
Article no. R23-1703-E



WSR-E 13.27/220,
Article no. R23-1702-E,
built into an existing pallet rack



Also available for other
rack sizes. Custom-made
versions can be supplied!



Suspension sumps
for unit width (mm)

	1800	2200	2700	3300
Model	WSR-E 13.18/220	WSR-E 13.22/220	WSR-E 13.27/220	WSR-E 13.33/220
Dimensions W x D x H (mm)	1780 x 1300 x 198	2180 x 1300 x 173	2680 x 1300 x 158	3280 x 1300 x 148
Depth 2 (mm)	970	970	970	970
Sump capacity (l)	220	220	220	220
Weight (kg)	148	174	210	256
Article no., fire-galvanized	R23-1701-E	R23-1704-E	R23-1702-E	R23-1703-E
Article no., PE-insert for aggressive media	R23-5601-E	R23-5604-E	R23-5602-E	R23-5603-E

The racks shown are not included in the price!