




Erläuterungen siehe Praxisinfos auf den Seiten 6 und 96!

KLEINGEBINDE - AUFFANGWANNEN

Zur Lagerung von wassergefährdenden und entzündbaren Flüssigkeiten in Kleingebinden

- ◆ Auffangwanne aus 3 mm Stahlblech verzinkt
- ◆ Auffangwanne entsprechend WHG - **Ü-Zeichen gemäß StawaR**
- ◆ Zum Aufstellen flach auf dem Boden
- ◆ Zur Lagerung von Säuren und Laugen sind für alle Typen PE-Wanneneinsätze lieferbar



KGW 20,
Artikel-Nr. P25-1305-A



KGW 30,
Artikel-Nr. P25-1306-A



KGW 35,
Artikel-Nr. P25-1302-A



PE-Wannen zur Kleingebindelagerung finden Sie auf Seite 35!



KGW 40,
Artikel-Nr. P25-1303-A



KGW 80,
Artikel-Nr. P25-1304-A

Typenbezeichnung	KGW 20	KGW 30	KGW 35	KGW 40	KGW 80
Außenmaße B x T x H in mm	500 x 500 x 123	996 x 596 x 75	1296 x 596 x 70	1000 x 500 x 123	1000 x 1000 x 123
Auffangvolumen in Liter	20	30	35	40	80
Gewicht in kg	12	21	26	21	36
Artikel-Nr., verzinkt	P25-1305-A	P25-1306-A	P25-1302-A	P25-1303-A	P25-1304-A

Zubehör	PE-Einsatz zum Lagern aggressiver Medien				
Artikel-Nr.	P25-1310-A	R71-2170-A	R71-2171-A	P25-1313-A	P25-1314-A




Erläuterungen siehe Praxisinfos auf den Seiten 6 und 86!



60 - LITER - AUFFANGWANNEN

Zur Lagerung von wassergefährdenden und entzündbaren Flüssigkeiten in Behältern und Fässern bis 60 Liter

- ◆ Auffangwanne aus 3 mm Stahlblech verzinkt
- ◆ Auffangwanne entsprechend WHG - **Ü-Zeichen gemäß StawaR**
- ◆ Herausnehmbare, feuerverzinkte Gitterroste
- ◆ Bodenfreiheit 100 mm für innerbetrieblichen Transport
- ◆ Korrosionsschutz durch Grundierung und Lackierung oder durch Stahlblech verzinkt
- ◆ Zur Lagerung von Säuren und Laugen sind für alle Typen PE-Wanneneinsätze lieferbar

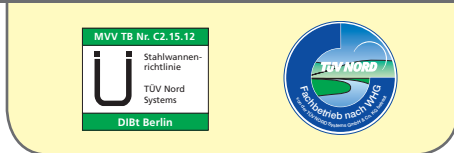

CW 60-2, Artikel-Nr. P64-2051-A



CW 60-4, Artikel-Nr. P64-2052-A



Fassböcke aus PE finden Sie auf Seite 40!



CW 60-6, Artikel-Nr. P64-2053-A



CW 60-2, Artikel-Nr. P64-2051-A, mit optionalem Fassbock aus PE



CW 60-4, Artikel-Nr. P64-2052-A, mit optionalem Fassbock aus PE

Typenbezeichnung	CW 60-2	CW 60-4	CW 60-6
Kapazität à 60-Liter-Fass	2	4	6
Außenmaße B x T x H in mm	820 x 500 x 280	900 x 820 x 215	1250 x 820 x 190
Auffangvolumen in Liter	60	60	60
Belastung in kg	150	300	450
Gewicht in kg	32	40	50
Artikel-Nr., lackiert	P64-2051-A	P64-2052-A	P64-2053-A
Artikel-Nr., verzinkt	P64-1051-A	P64-1052-A	P64-1053-A

Zubehör	PE-Einsatz zum Lagern aggressiver Medien		
Artikel-Nr.	P64-2061-A	P64-2062-A	P64-2063-A




Explanations see practical informations on page 6 and 84!

SUMP TRAYS FOR SMALL CONTAINERS

For the storage of water-endangering and flammable liquids in small containers

- ◆ Base sump tray made from 3 mm galvanized sheet steel
- ◆ Base sump tray according to WHG - **Ü-sign according to StawaR**
- ◆ For placing flat on the floor
- ◆ PE inserts are available for all models for the storage of acids and alkalis



KGW 20,
Article no. P25-1305-A



KGW 30,
Article no. P25-1306-A



KGW 35,
Article no. P25-1302-A



PE sump trays for the storage of small containers can be found on page 33!



KGW 40,
Article no. P25-1303-A



KGW 80,
Article no. P25-1304-A

Model	KGW 20	KGW 30	KGW 35	KGW 40	KGW 80
External dimensions W x D x H (mm)	500 x 500 x 123	996 x 596 x 75	1296 x 596 x 70	1000 x 500 x 123	1000 x 1000 x 123
Sump capacity (l)	20	30	35	40	80
Weight (kg)	12	21	26	21	36
Article no., galvanized	P25-1305-A	P25-1306-A	P25-1302-A	P25-1303-A	P25-1304-A

Accessory	PE insert for storage of aggressive media				
Article no.	P25-1310-A	R71-2170-A	R71-2171-A	P25-1313-A	P25-1314-A




Explanations see practical informations on page 6 and 84!

SUMP PALLETS FOR 60 LITER DRUMS

For the storage of water-endangering and flammable liquids in containers and drums up to 60 liter

- ◆ Base sump tray made from 3 mm sheet steel
- ◆ Base sump tray according to WHG - **Ü-sign according to StawaR**
- ◆ Removable galvanized grid
- ◆ Ground clearance 100 mm for internal transport
- ◆ Corrosion protection by primer coating and painting or by galvanized sheet steel
- ◆ PE inserts are available for all models for the storage of acids and alkalis

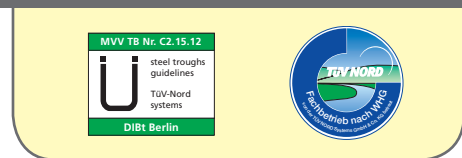

CW 60-2,
Article no. P64-2051-A



CW 60-4,
Article no. P64-2052-A



CW 60-6,
Article no. P64-2053-A



PE drum stands
can be found
on page 38!



CW 60-2, Article no. P64-2051-A,
with optional PE drum stand



CW 60-4, Article no. P64-2052-A,
with optional PE drum stand

Model	CW 60-2	CW 60-4	CW 60-6
Capacity, 60 liter drums	2	4	6
External dimensions W x D x H (mm)	820 x 500 x 280	900 x 820 x 215	1250 x 820 x 190
Sump capacity (l)	60	60	60
Max. load (kg)	150	300	450
Weight (kg)	32	40	50
Article no., painted	P64-2051-A	P64-2052-A	P64-2053-A
Article no., galvanized	P64-1051-A	P64-1052-A	P64-1053-A
Accessory	PE insert for the storage of aggressive media		
Article no.	P64-2061-A	P64-2062-A	P64-2063-A