



## FASSWAGEN FÜR 60-/ 200-LITER-FÄSSER

### Zum Lagern und Transportieren von wassergefährdenden und entzündbaren Flüssigkeiten

- ◆ Auffangwanne aus 3 mm Stahlblech
- ◆ Auffangwanne entsprechend WHG - **Ü-Zeichen gemäß StawaR**
- ◆ Herausnehmbare, feuerverzinkte Gitterroste
- ◆ Korrosionsschutz durch Grundierung und Lackierung oder **Feuerverzinkung**
- ◆ Standardmäßig mit 2 Lenk- und 2 Bockrollen und Schubstange



WSP-20S/W, feuerverzinkt, Artikel-Nr. P21-1407-A, mit optionalem Fassbock



WSP-10S/W, Artikel-Nr. P21-2406-A, mit optionalem Zurrigurt



WSP-20S/W60, Artikel-Nr. P21-2408-A



WSP-20S/W, feuerverzinkt Artikel-Nr. P21-1407-A



Drehbare Rollenauflage, Artikel-Nr. Z50-1925-B

Typenbezeichnung	WSP-20S/W60	WSP-10S/W	WSP-20S/W
Außenmaße B x T in mm	820 x 500	800 x 860	800 x 1400
Höhe (ohne Schubstange) in mm	345	525	405
Auffangvolumen in Liter	60	220	220
Kapazität à 60/200-Liter-Fass (stehend)	2 x 60	1 x 200	2 x 200
Artikel-Nr., lackiert	P21-2408-A	P21-2406-A	P21-2407-A
Artikel-Nr., feuerverzinkt	P21-1408-A	P21-1406-A	P21-1407-A

Zubehör	Artikel-Nr.
Zurrigurt	Z50-1920-A
Drehbare Rollenauflage	Z50-1925-B



Erläuterungen siehe Praxisinfos auf den Seiten 6 und 86!



**FASS-SCHRÄNKE AUS STAHL**

**Zur Lagerung von wassergefährdenden und entzündbaren Flüssigkeiten**


- ◆ Auffangwanne aus 3 mm Stahlblech
- ◆ Auffangwanne entsprechend WHG - **Ü-Zeichen gemäß StawaR**
- ◆ 100 mm Bodenfreiheit für Staplertransport
- ◆ Abschließbare Ausführungen, dadurch auch zur Lagerung im Freien geeignet
- ◆ Auffangvolumen 220 Liter
- ◆ Korrosionsschutz durch Grundierung und Lackierung der Auffangwanne
- ◆ Wetterschutzaufbau aus Stahlblech verzinkt, mit Lüftungsöffnungen in den Seitenwänden zur passiven Lagerung von entzündbaren Flüssigkeiten
- ◆ Dokumentenablage im Türfach serienmäßig



**WSP-1SKKS-D,  
Artikel-Nr. P21-2480-A**



**WSP-2SKKS-D,  
Artikel-Nr. P21-2481-A**

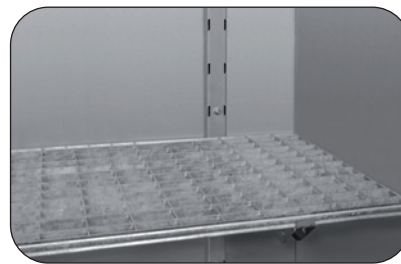

**Gitterrostböden im Raster von  
100 mm höhenverstellbar**



**Lüftungsöffnungen in den  
Seitenwänden**



**WSP-1SKKS-D/GR,  
Artikel-Nr. P21-2482-A**



**WSP-2SKKS-D/GR,  
Artikel-Nr. P21-2483-A**

Typenbezeichnung	WSP-1SKKS-D	WSP-2SKKS-D	WSP-1SKKS-D/GR	WSP-2SKKS-D/GR
Kapazität à 200-Liter-Fass	1	2	-	-
Außenmaße B x T in mm	900 x 750	1760 x 750	900 x 750	1760 x 750
Gesamthöhe in mm	1900	1720	1900	1720
Innenmaße B x T in mm	740 x 660	2 x 740 x 660	740 x 660	2 x 740 x 660
Fachhöhe in mm	1360	1360	3 x 400	3 x 400
Auffangvolumen in Liter	220	220	220	220
Belastung in kg	250	500	250	500
Gewicht in kg	132	196	146	230
Artikel-Nr., Wanne lackiert, Aufbau verzinkt	<b>P21-2480-A</b>	<b>P21-2481-A</b>	<b>P21-2482-A</b>	<b>P21-2483-A</b>





Explanations see practical informations on page 6 and 84!

## DRUM CARTS FOR 60 / 200 LITER DRUMS

### For the transport of water-endangering and flammable liquids

- ◆ Base sump tray made from 3 mm sheet steel
- ◆ Base sump tray according to WHG - **Ü-sign according to StawaR**
- ◆ Removable galvanized grid
- ◆ Corrosion protection by primer coating and painting or by **fire-galvanization**
- ◆ Equipped with 2 fixed and 2 swiveling castors and push bar as standard



**WSP-20S/W, fire-galvanized,**  
Article no. P21-1407-A,  
with optional drum stand



Suitable drum stands  
can be found  
on page 17!



**WSP-10S/W,**  
Article no. P21-2406-A,  
with optional tension belt



**WSP-20S/W60,**  
Article no. P21-1408-A



PE drum carts can be  
found on page 39!



**WSP-20S/W, fire-galvanized,**  
Article no. P21-1407-A



**Rotating drum support,**  
Article no. Z50-1925-B

Model	WSP-20S/W60	WSP-10S/W	WSP-20S/W
External dimensions W x D (mm)	820 x 500	800 x 860	800 x 1400
Height (without push bar) (mm)	345	525	405
Sump capacity (l)	60	220	220
Capacity, 200 liter drums (vertical)	2 x 60	1 x 200	2 x 200
Article no., painted	P21-2408-A	P21-2406-A	P21-2407-A
Article no., fire-galvanized	P21-1408-A	P21-1406-A	P21-1407-A


Accessories	Article no.
Tension belt	Z50-1920-A
Rotating drum support	Z50-1925-B



STEEL DRUM CABINETS

For the storage of water-endangering liquids


- ◆ Base sump tray made from 3 mm sheet steel
- ◆ Base sump tray according to WHG - **Ü-sign according to StawaR**
- ◆ Ground clearance 100 mm for internal transport
- ◆ Lockable versions also suitable for storage outdoors
- ◆ Sump capacity 220 liter
- ◆ Corrosion protection by primer coating and painting of sump pallet
- ◆ Weather-proof superstructure made from galvanized sheet steel, with venting slots in the side walls
- ◆ Compartment for documents in the door(s) as standard

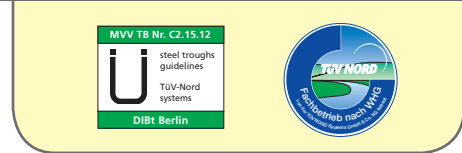

**WSP-1SKKS-D,**  
Article no. P21-2480-A



**WSP-2SKKS-D,**  
Article no. P21-2481-A

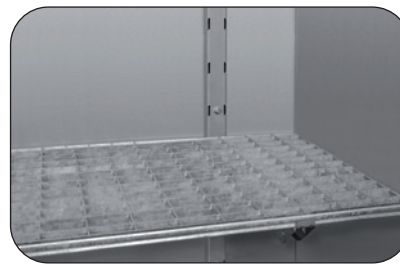

Height-adjustable galvanized  
grids at intervals of 100 mm



Venting slots in the sidewalls



**WSP-1SKKS-D/GR,**  
Article no. P21-2482-A



**WSP-2SKKS-D/GR,**  
Article no. P21-2483-A

Model	WSP-1SKKS-D	WSP-2SKKS-D	WSP-1SKKS-D/GR	WSP-2SKKS-D/GR
Capacity, 200 liter drums	1	2	-	-
External dimensions W x D (mm)	900 x 750	1760 x 750	900 x 750	1760 x 750
Total height (mm)	1900	1720	1900	1720
Internal dimensions W x D (mm)	740 x 660	2 x 740 x 660	740 x 660	2 x 740 x 660
Compartment height (mm)	1360	1360	3 x 400	3 x 400
Sump capacity (l)	220	220	220	220
Max. load (kg)	250	500	250	500
Weight (kg)	132	196	146	230
Article no., painted sump pallet, galvanized superstructure	P21-2480-A	P21-2481-A	P21-2482-A	P21-2483-A